HannStar Product Information

(Tentative)

Model : **HSD170PGW1 -A00**

Note:1.The information contained herein is tentative and may be changed without prior notices.
   2.Please contact HannStar Display Corp. before designing your product based on this module specification.
   3.The information contained herein is presented merely to indicate the characteristics and perfor-mance of our products. No responsibility is assumed by HannStar for any intellectual property claims or other problems that may result from application based on the module described herein.

Record of Revisions

Rev.	Date	Description of change
1.0	Feb.16, 2006	HSD170PGW1-A Tentative Product Information was first issued.

HannStar Display Corp.

Document Title	HSD170PGW1-A Tentative Product Information	Page No.	3 / 33
Document No.		Revision	1.0

Contents

HannStar Display Corp.

Document Title	HSD170PGW1-A Tentative Product Information	Page No.	4 / 33
Document No.		Revision	1.0

1.0 GENERAL DESCRIPTION

1.1 Introduction

HannStar Display model HSD170PGW1-A is a color active matrix thin film transistor (TFT)liquid crystal display(LCD) that uses amorphous silicon TFT as a switching device. This model is composed of a TFT LCD panel, a driving circuit and a back light system. This TFT LCD has a 17.0 inch diagonally measured active display area with XGA resolution (900 vertical by 1440 horizontal pixel array) and can display up to 262,144 colors.

1.2 Features

- 17.0 WXGA+ for Notebook PC
- 2-ch LVDS interface system
- Compatible with VESA standard
- Input timing: DE mode
- Wide Viewing Angle
- RoHS compliance

1.3 Applications

- Notebook PC
- Desktop Monitor
- Display terminals for AV applications
- Display terminals for industrial applications

1.4 General information

Item		Specification	Unit
Outline Dimension		382.2 x 244.5 x 6.2 (Typ)	mm
Display area		367.2 (H) x 229.5 (V)	mm
Number of Pixel		1440(H) x 900(V)	pixels
Pixel pitch		0.255(H) x 0.255(V)	mm
Pixel arrangement		RGB Vertical stripe	
Display color		6 Bits / 262,144	colors
Display mode		Normally white	
Surface treatment		Glare, Hard- Coating (3H)	
Weight		675 (Typ.)	g
Back-light		Single CCFL (Side-Light type)	
Input signal		2-ch LVDS	
Power Consumption	Logic System	1.45 (typ.) @v-color pattern	W
	B/L System	4.9 (typ.)	W

HannStar Display Corp.

Document Title	HSD170PGW1-A Tentative Product Information	Page No.	5 / 33
Document No.		Revision	1.0

1.5 Mechanical Information

Item		Min.	Typ.	Max.	Unit
Module Size	Horizontal(H)	381.7	382.2	382.7	mm
	Vertical(V)	244	244.5	245	mm
	Depth(D)	—	6.2	6.5	mm
Weight (Without inverter)		—	675	690	g
Torque of customer screw hole		—	-	2.5	Kgf•Cm

HannStar Display Corp.

Document Title	HSD170PGW1-A Tentative Product Information	Page No.	6 / 33
Document No.		Revision	1.0

2.0 ABSOLUTE MAXIMUM RATINGS

2.1 Absolute Rating of Environment

Item	Symbol	Min.	Max.	Unit	Note
Storage temperature	T_{STG}	-20	60	^oC	
Operating temperature	T_{OPR}	0	50	^oC	(1)
Vibration(non-operating)	V_{NOP}	—	1.5	G	(2)
Shock(non-operating)	S_{NOP}	—	220	G	(3)
Storage humidity	H_{STG}	10	90	%RH	(3)
Operating humidity	H_{OP}	10	80	%RH	(4)
Low pressure(operating)	P_{LOP}	697	—	hPa	(5)
Low pressure(non-operating)	P_{LNOP}	116	—	hPa	(6)

Note (1) Storage / Operating temperature
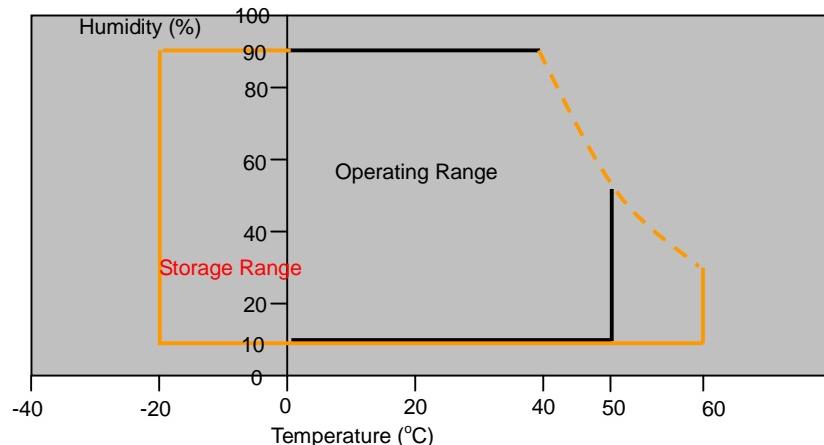
(2) 5-500-5Hz sine wave, X,Y,Z each directions, 30min/cycle.

(3) 2ms, ±X, ±Y, ±Z direction, one time each. For this shock test, it is necessary to fill the silicon rubber between the shock jig as buffer.

(4) Max wet bulb temp.=39^oC

(5) 2hrs. (10000 feet)

(6) 24hrs. (50000 feet)

HannStar Display Corp.

Document Title	HSD170PGW1-A Tentative Product Information	Page No.	7 / 33
Document No.		Revision	1.0

2.2 Electrical Absolute Rating

2.2.1 TFT LCD Module

Item	Symbol	Min.	Max.	Unit	Note
Power supply voltage	V_{DD}	-0.3	4.0	V	(1) (2)
Logic input voltage	V_{IN}	-0.3	VDD+0.3	V	(1) (2)

2.2.2 Back-Light Unit

Item	Symbol	Min.	Max.	Unit	Note
Lamp current	I_L	3	7.5	mA	(1) (2)
Lamp frequency	f_L	30	80	KHz	(1) (2)

Note (1) Permanent damage may occur to the LCD module if beyond this specification. Functional operation should be restricted to the conditions described under normal operating conditions.

(2) Ta =25±2℃

HannStar Display Corp.

Document Title	HSD170PGW1-A Tentative Product Information	Page No.	8 / 33
Document No.		Revision	1.0

3.0 OPTICAL CHARACTERISTICS

3.1 Optical specification

| Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Contrast		CR		600	800	-		(1)(2)
Response time	Rising	T_R		-	6	13	msec	(1)(3)
	Falling	T_F		-	10	17		
White luminance (Average of 5 points)		Y_L		170	200	-	cd/m^2	(1)(4)(5) (I_L=6.5mA)
Color chromaticity (CIE1931)	Red	R_x	Θ=0 viewing angle	0.591	0.621	0.651		(1)(4)
		R_y		0.319	0.349	0.379		
	Green	G_x		0.290	0.320	0.350		
		G_y		0.528	0.558	0.588		
	Blue	B_x		0.126	0.156	0.186		
		B_y		0.119	0.149	0.179		
	White	W_x		0.283	0.313	0.343		
		W_y		0.299	0.329	0.359		
Viewing angle	Hor.	Θ_L	CR>10	65	70	-		
		Θ_R		65	70	-		
	Ver.	Θ_U		60	65	-		
		Θ_D		60	65	-		
Brightness uniformity		B_{UNI}	Θ=0	50	-	-	%	(6)

3.2 Measuring Condition

- Measuring surrounding: dark room
- Lamp current I_{BL}: (6.5)±0.1mA
- V_{DD}=3.3V±0.05V
- Ambient temperature : 25±2^{o}C
- 30min. Warm-up time.

HannStar Display Corp.

Document Title	HSD170PGW1-A Tentative Product Information	Page No.	9 / 33
Document No.		Revision	1.0

3.3 Measuring Equipment

■ FPM520 of Westar Electric Corp., which utilized SR-3 for Chromaticity and BM-5A for other optical characteristics.

■ Measuring spot size : 20~21mm

Note (1) Definition of Viewing Angle :

Θ_U

12' o'clock
$\Phi=90^o$

Θ_L

Θ_R

$\Phi=180^o$

$\Phi=0^o$

Θ_D

6' o'clock
$\Phi=270^o$
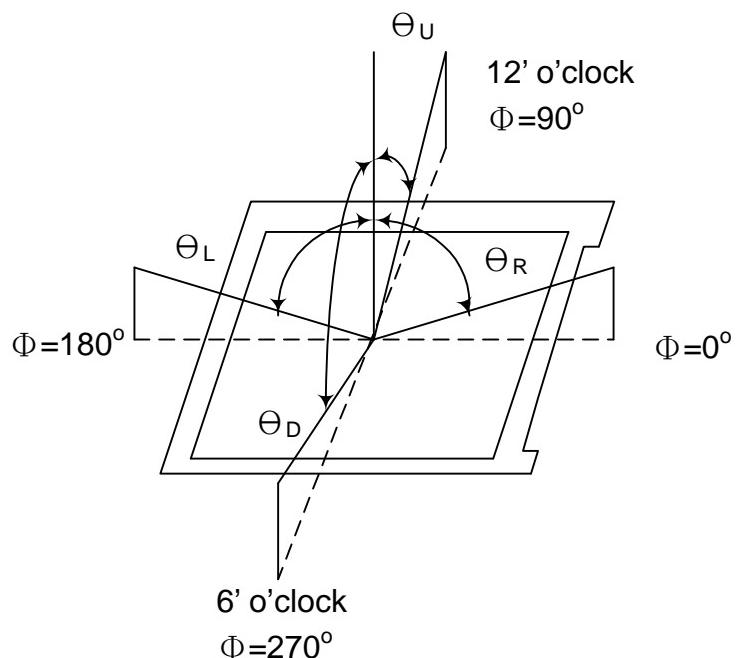
Note (2)   Definition of Contrast Ratio(CR) : measured at the center point of panel

$$CR = \frac{\text{Luminance with all pixels white (L63)}}{\text{Luminance with all pixels black (L0)}}$$

Note (3) Definition of Response Time : Sum of T_R and T_F

HannStar Display Corp.

Document Title	HSD170PGW1-A Tentative Product Information	Page No.	10 / 33
Document No.		Revision	1.0

white(TFT OFF)   black   (TFT ON)   white(TFT OFF)

T_R T_F

100%
90%

Optical
response

10%
0%

time
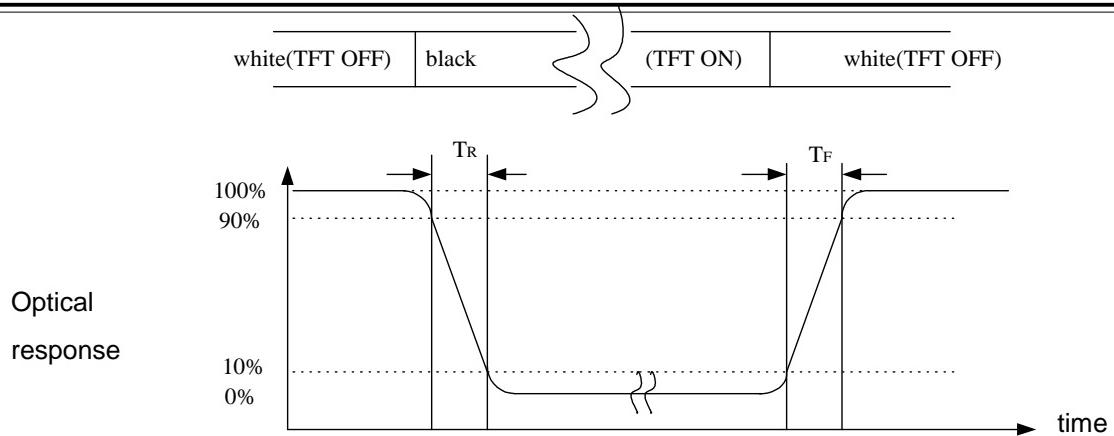
Note (4) Optical characteristic measurement setup

LCD Panel

Field = 1^o

Photo-detector (BM-5A)

120cm

HannStar Display Corp.
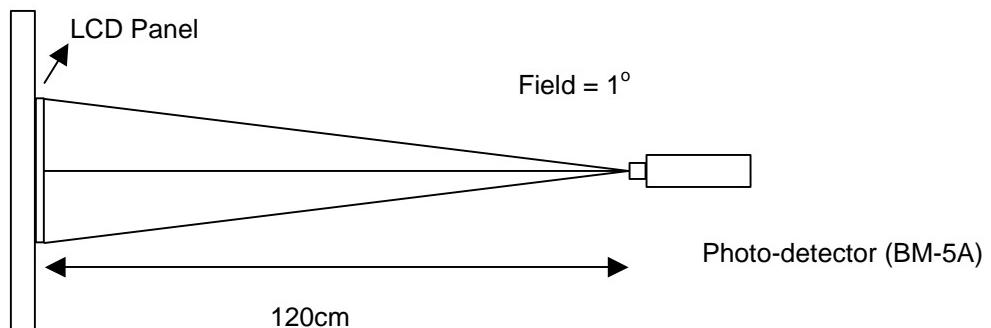
Document Title	HSD170PGW1-A Tentative Product Information	Page No.	11 / 33
Document No.		Revision	1.0

Note (5) Definition of Average Luminance of White (5 Point)

$$\text{Average Luminance} = \frac{Y_1 + Y_2 + Y_3 + Y_4 + Y_5}{5}$$
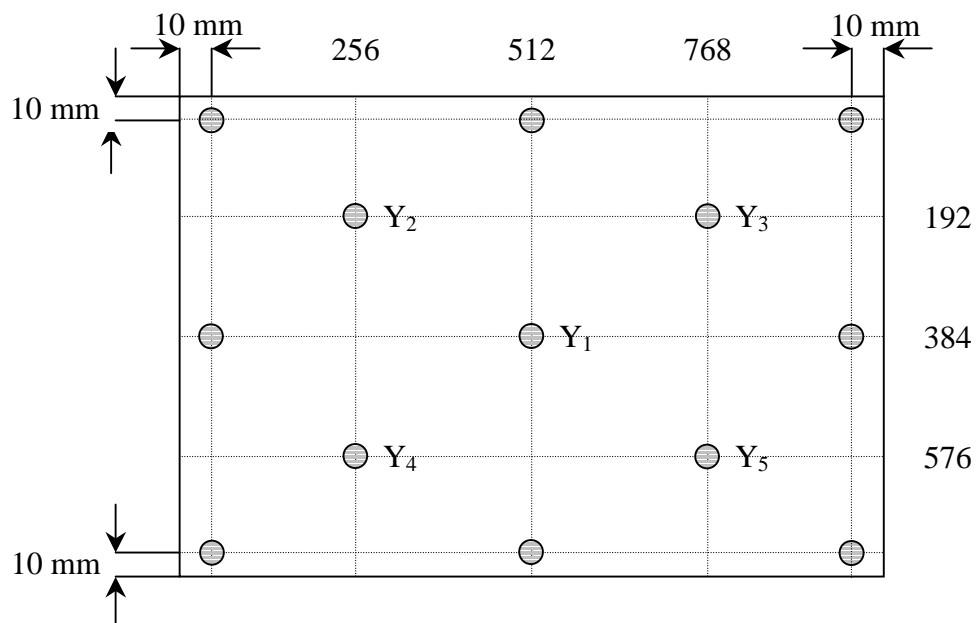
Note (6) Definition of brightness uniformity

$$\text{Luminance uniformity} = \frac{(\text{Min Luminance of 13 points})}{(\text{Max Luminance of 13 points})} \times 100\%$$

HannStar Display Corp.

Document Title	HSD170PGW1-A Tentative Product Information	Page No.	12 / 33
Document No.		Revision	1.0

4.0 BLOCK DIAGRAM

4.1 TFT LCD Module

```
Connector CN1 → TCON with LVDS receiver → X-driver IC
                                         → Y-driver IC → Liquid Crystal Panel 1440×900 pixels
              ↔ EDID
              → DC/DC Converter
              → Reference Voltage Generation Circuit
```

4.2 Back Light Unit

```
                                    1 ← VL
                                    2 ← GL
```

HannStar Display Corp.
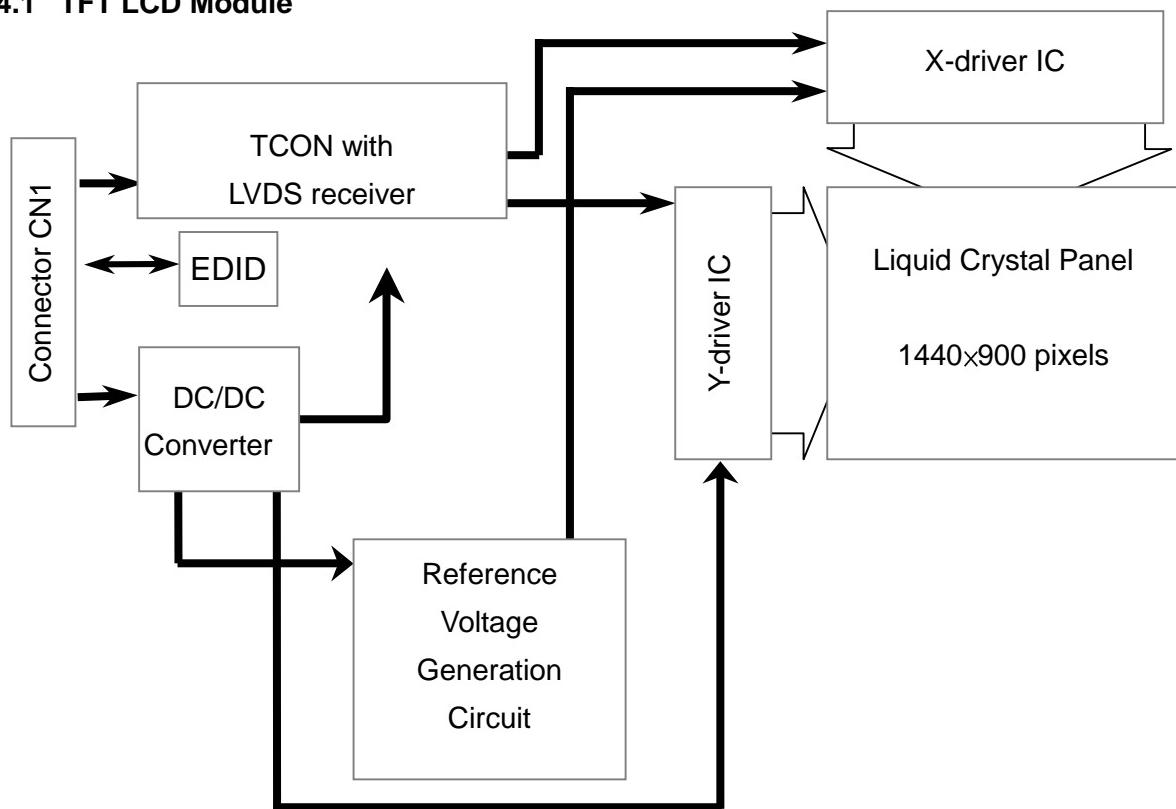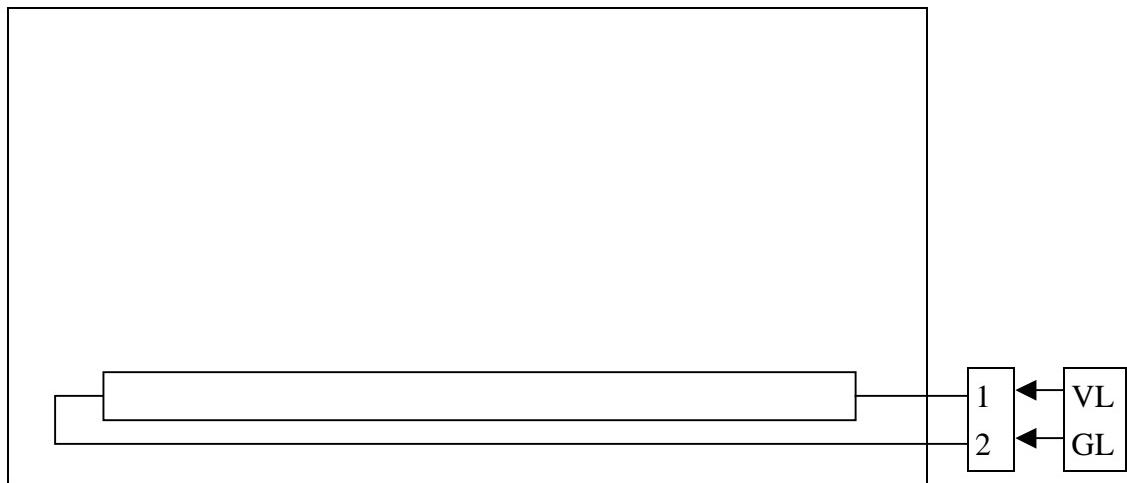
Document Title	HSD170PGW1-A Tentative Product Information	Page No.	13 / 33
Document No.		Revision	1.0

4.3 Pixel Format

HannStar Display Corp.
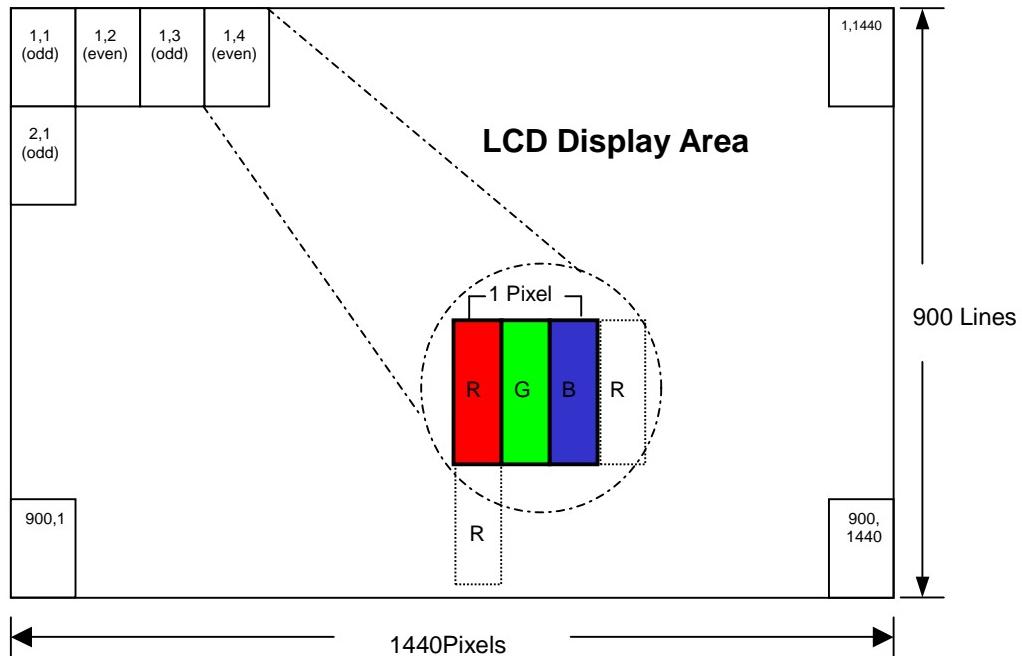
Document Title	HSD170PGW1-A Tentative Product Information	Page No.	14 / 33
Document No.		Revision	1.0

4.4 Relationship Between Displayed Color and Input

	Display	MSB R5	R4	R3	R2	R1	LSB R0	MSB G5	G4	G3	G2	G1	LSB G0	MSB B5	B4	B3	B2	B1	LSB B0	Gray scale level
Basic color	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	-
	Blue	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	-
	Green	L	L	L	L	L	L	H	H	H	H	H	H	L	L	L	L	L	L	-
	Light Blue	L	L	L	L	L	L	H	H	H	H	H	H	H	H	H	H	H	H	-
	Red	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	-
	Purple	H	H	H	H	H	H	L	L	L	L	L	L	H	H	H	H	H	H	-
	Yellow	H	H	H	H	H	H	H	H	H	H	H	H	L	L	L	L	L	L	-
	White	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	-
Gray scale of Red	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0
	Dark ↑ ↓ Light	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L1
		L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L2
		:						:						:						L3…L60
		H	H	H	H	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L61
		H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L62
	Red	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	Red L63
Gray scale of Green	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0
	Dark ↑ ↓ Light	L	L	L	L	L	L	L	L	L	L	L	H	L	L	L	L	L	L	L1
		L	L	L	L	L	L	L	L	L	L	H	L	L	L	L	L	L	L	L2
		:						:						:						L3…L60
		L	L	L	L	L	L	H	H	H	H	L	H	L	L	L	L	L	L	L61
		L	L	L	L	L	L	H	H	H	H	H	L	L	L	L	L	L	L	L62
	Green	L	L	L	L	L	L	H	H	H	H	H	H	L	L	L	L	L	L	Green L63
Gray scale of Blue	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0
	Dark ↑ ↓ Light	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	L1
		L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	L	L2
		:						:						:						L3…L60
		L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	L	H	L61
		L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	L	L62
	Blue	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	Blue L63
Gray scale of White & Black	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0
	Dark ↑ ↓ Light	L	L	L	L	L	H	L	L	L	L	L	H	L	L	L	L	L	H	L1
		L	L	L	L	H	L	L	L	L	L	H	L	L	L	L	L	H	L	L2
		:						:						:						L3…L60
		H	H	H	H	L	H	H	H	H	H	L	H	H	H	H	H	L	H	L61
		H	H	H	H	H	L	H	H	H	H	H	L	H	H	H	H	H	L	L62
	White	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	White L63

HannStar Display Corp.

Document Title	HSD170PGW1-A Tentative Product Information	Page No.	15 / 33
Document No.		Revision	1.0

5.0 INTERFACE PIN CONNECTION

5.1 TFT LCD Module

CN1 (INPUT SIGNAL): 093F30-B0B01A (STARCONN or equivalent)

MATING CONNECTOR: FI-X30M or compatible

Terminal no.	Symbol	Function	Note
1	GND	Ground	
2	VDD	Power Supply : +3.3V	
3	VDD	Power Supply : +3.3V	
4	VEDID	DDC 3.3V power	
5	NC	Reserved for supplier test point	
6	ClkEDID	DDC clock	
7	DataEDID	DDC data	
8	Odd_Rin0-	- LVDS differential data input (R0-R5, G0)	(2)
9	Odd_Rin0+	+ LVDS differential data input (R0-R5, G0)	(2)
10	GND	Ground	
11	Odd_Rin1-	- LVDS differential data input (G1-G5, B0-B1)	(2)
12	Odd_Rin1+	+ LVDS differential data input (G1-G5, B0-B1)	(2)
13	GND	Ground	
14	Odd_Rin2-	- LVDS differential data input (B2-B5,NC,NC,DE)	(2)
15	Odd_Rin2+	+ LVDS differential data input (B2-B5,NC,NC,DE)	(2)
16	GND	Ground	
17	Odd_ClkIN-	- LVDS differential clock input	(2)
18	Odd_ClkIN+	+ LVDS differential clock input	(2)
19	GND	Ground	
20	Even_Rin0-	- LVDS differential data input (R0-R5, G0)	
21	Even_Rin0+	+ LVDS differential data input (R0-R5, G0)	
22	GND	Ground	
23	Even_Rin1-	- LVDS differential data input (G1-G5, B0-B1)	
24	Even_Rin1+	+ LVDS differential data input (G1-G5, B0-B1)	
25	GND	Ground	
26	Even_Rin2-	- LVDS differential data input (B2-B5,NC,NC,DE)	
27	Even_Rin2+	+ LVDS differential data input (B2-B5, NC, NC, DE)	
28	GND	Ground	
29	Even_ClkIN-	- LVDS differential clock input	
30	Even_ClkIN+	+ LVDS differential clock input	

Note (1) Please connects NC pin to nothing. Don't connect it to ground nor to other signal input. (NC pin should be open.)

Note (2) The module used a 100ohm resistor between positive and negative data lines of each receiver input.

5.2 Back-Light Unit

CN2 CCFL Power Source (BHSR-02VS-1 or equivalent) / JAPAN SOLDERLESS TERMINAL MFG CO., LTD.

Mating Connector: (SBHT-002T-P0.5) / JAPAN SOLDERLESS TERMINAL MFG CO., LTD.

Terminal no.	Symbol	Function
1	VL	CCFL power supply (high voltage)
2	GL	CCFL power supply (low voltage)

HannStar Display Corp.

| Document Title | HSD170PGW1-A Tentative Product Information | Page No. | 16 / 33 |
| Document No. | | Revision | 1.0 |

6.0 ELECTRICAL CHARACTERISTICS
6.1 TFT LCD Module

Item		Symbol	Min.	Typ.	Max.	Unit	Note
Voltage of power supply		V_{DD}	3.0	3.3	3.6	V	
Current of power supply	White	I_{DD0}	-	330	-	mA	(1)
	V-Color	I_{DD1}	-	440	-	mA	(1)
	Mosaic	I_{DD2}	-	560	-	mA	(1)
Vsync frequency		f_V	-	60	-	Hz	ref 6.5 t1
Hsync frequency		f_H	-	55.469	55.935	KHz	ref 6.5 t4
Frequency		f_{DCLK}	-	88.75	106.5	MHz	ref 6.5 t7
Input rush current		I_{Rush}	-	-	1.5	A	(2)

Note (1)

1). White & V-Color :

White

White Yellow Purple Red Cyan Green Blue Black
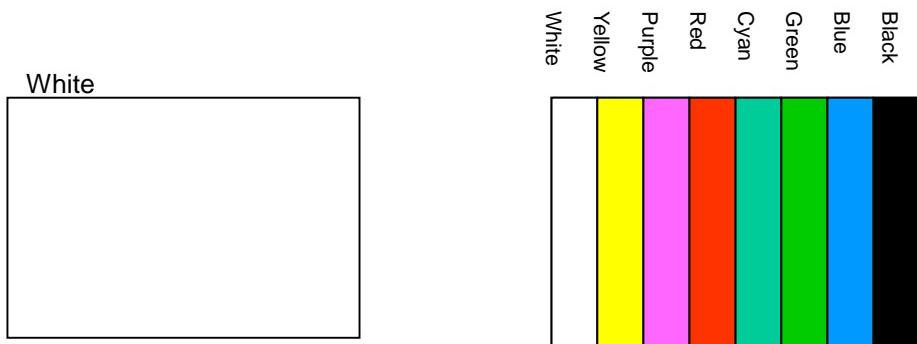
2). Mosaic : Dot checker image

Grey scale: L0～L63.
L0: Luminance with all pixels black.
L63: Luminance with all pixels white.

HannStar Display Corp.
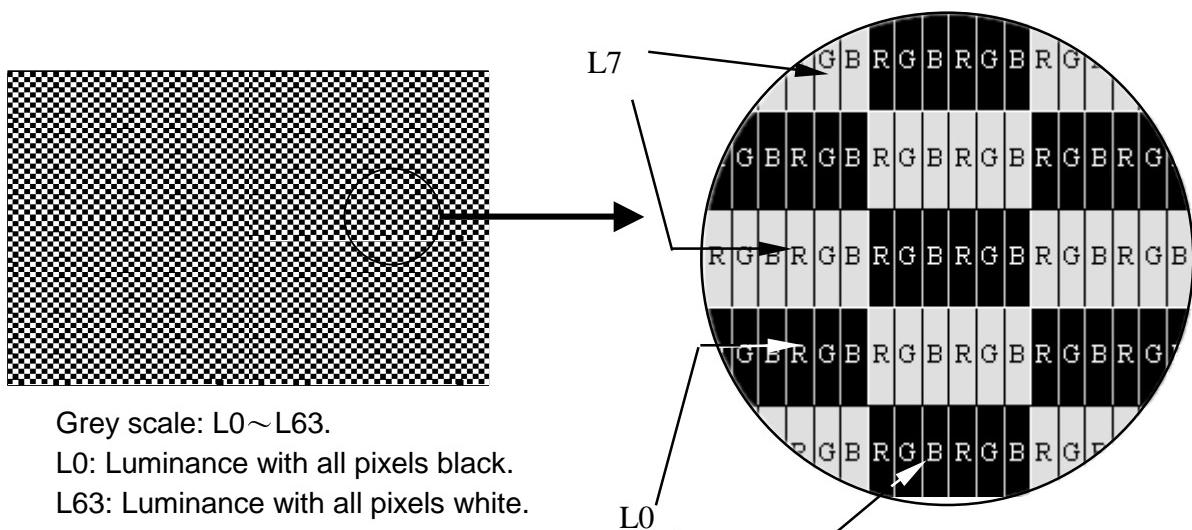
Document Title	HSD170PGW1-A Tentative Product Information	Page No.	17 / 33
Document No.		Revision	1.0

Note (2) **Input Rush Current measurement condition**

HannStar Display Corp.
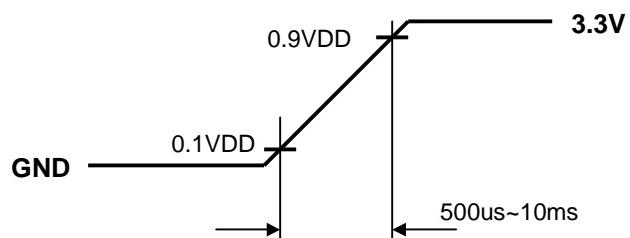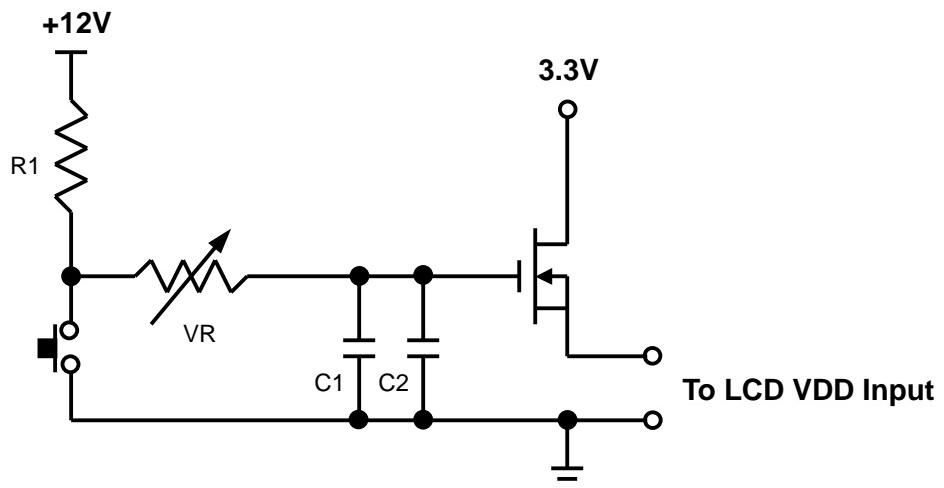
Document Title	HSD170PGW1-A Tentative Product Information	Page No.	18 / 33
Document No.		Revision	1.0

6.2 Back-Light Unit

The back-light system is an edge-lighting type with 1 CCFL(Cold Cathode Fluorescent Lamp). The characteristics of the lamp is shown in the following tables.

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Lamp current	IL	3.0	6.5	7.5	mA(rms)	(1)(6)
Lamp voltage	VL	-	750	-	V(rms)	(6)I_L=6.5mA
Frequency	fL	30	-	80	KHz	(2)
Operating lamp life time	Hr	15,000	—	—	Hour	(3)
Startup voltage	Vs	TBD	—	—	V(rms)	(4)(5)at 25^{o}C
		TBD				(4)(5)at 0^{o}C

Note (1) Lamp current is measured with current meter for high frequency as shown below. Specified valued are for single lamp.
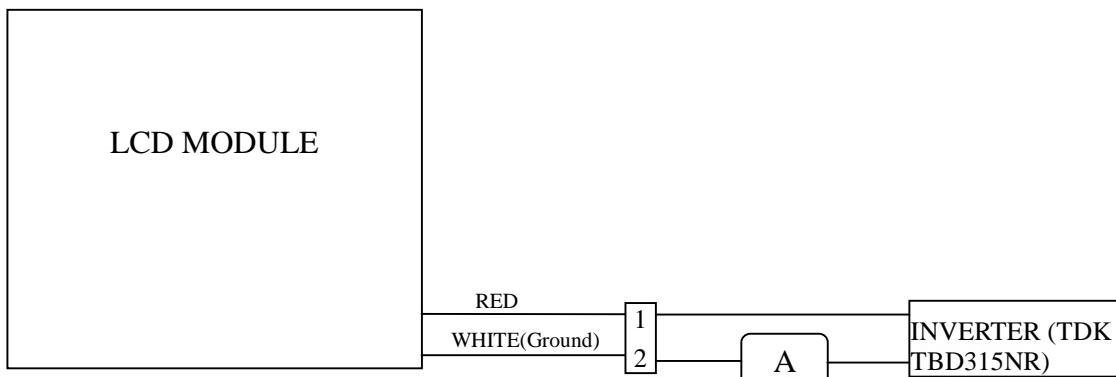
Note (2) Lamp frequency may produce interference with horizontal synchronous frequency and this may cause ripple noise on the display. Therefore lamp frequency shall be kept away from the horizontal synchronous frequency and its harmonics as far as possible in order to avoid interference.

*Suggest the inverter frequency avoid fL=51~59KHz

Note (3) Lamp life time (Hr) can be defined as the time in which it continues to operate under the condition : Ta=25±3 ^{o}C, typical IL value indicated in the above table and fL=52kHz until the brightness becomes less than 50%.

Note (4) CCFL inverter should be able to provide a voltage over specified value (Vs) in the above table. Lamp units need at least Vs value shown above to ignition.

Note (5) The voltage over specified value (Vs) should be applied to the lamp more than 1 second after startup. Otherwise, the lamp may not be turned on. The used lamp current is the lamp typical current.

HannStar Display Corp.

Document Title	HSD170PGW1-A Tentative Product Information	Page No.	19 / 33
Document No.		Revision	1.0

Note (6) The output voltage waveform and current waveform of the inverter must be symmetrical (Unsymmetrical ratio is less than 10%). Please do not use the inverter which has unsymmetrical voltage and current waveform, and spike waveform. The inverter design which can provide the best optical performance, power efficiency, and lamp life should under the following conditions.

a. The asymmetry rate of the inverter waveform should be less than 10%.

b. The distortion tae of the waveform should be within $\sqrt{2}\pm10\%$.

c. The inverter output waveform should be better similar to the ideal sine wave.
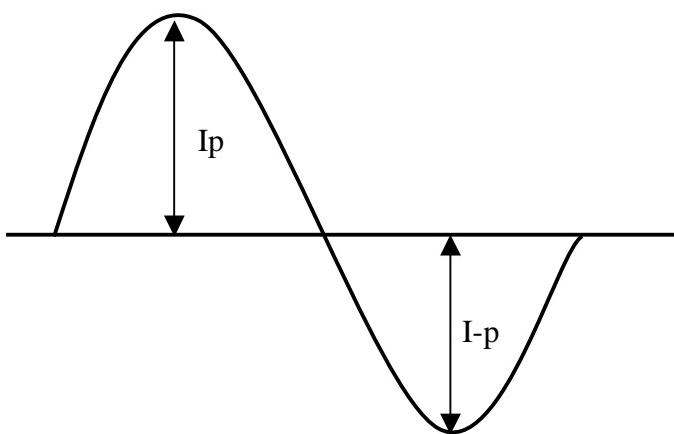
Asymmetry rate = |Ip-I-p| / Irms x 100%
Distortion rate = Ip (or I-p) / Irms

HannStar Display Corp.

Document Title	HSD170PGW1-A Tentative Product Information	Page No.	20 / 33
Document No.		Revision	1.0

6.3 Switching Characteristics for LVDS Receiver

Item	Symbol	Min.	Typ.	Max.	Unit	Conditions
Differential Input High Threshold	V_{th}	—	—	100	mV	V_{CM}=1.2V
Differential Input Low Threshold	V_{tl}	-100	—	—	mV	
Input Current	I_{IN}	—	—	±10	uA	V_{IN}=1.75V,V_{DD}=3.6V
		—	—	±10	uA	V_{IN}=0.8V,V_{DD}=3.6V
Input Voltage Range(Signal ended)	V_{IN}	$1.1-(|V_{ID}|)/2$	—	$1.375+(|V_{ID}|)/2$	V	
Differential input Voltage	$|V_{ID}|$	250	—	450	mV	
Common Mode Voltage Offset	V_{CM}	1.1	—	1.375	V	
Clock Frequency	fc	—	88.75	106.5	MHz	
LVDS Skew Margin	t_{RSKM}	—	—	400	pS	At fc=88.75MHz
LVDS Input Clock Jitter Tolerance	—	—	—	±2.5	%	center spread

RCLK

Rin0

Rin1

Rin2

t_{RSKM} t_{RSKM}
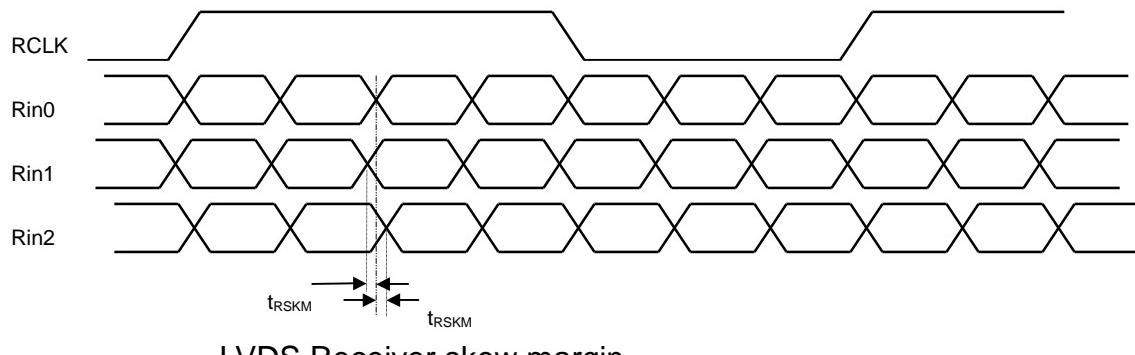
LVDS Receiver skew margin

HannStar HannStar Display Corp.

Document Title	HSD170PGW1-A Tentative Product Information	Page No.	21 / 33
Document No.		Revision	1.0

6.4 Bit Mapping & Interface Definition
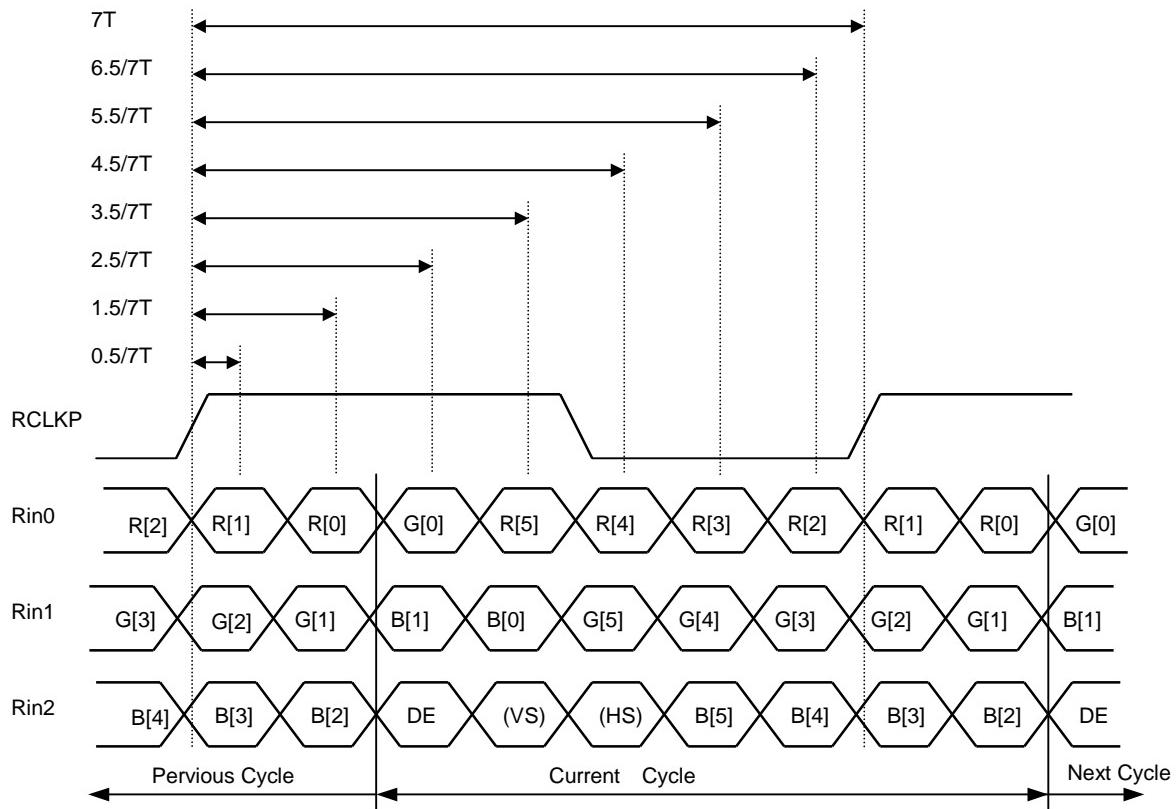
Bit Mapping & Timing Definition

HannStar Display Corp.

Document Title	HSD170PGW1-A Tentative Product Information	Page No.	22 / 33
Document No.		Revision	1.0

6.5 Interface Timing (DE mode) [1)2)3)4)5)6)]

Item	Symbol	Min.	Typ.	Max.	Unit
V-Total Time	t1	-	926	934	line
Vertical Display Time	t2	-	900	-	line
Vertical Blanking Time	t3	-	26	34	line
H-Total Time	t4	-	1600	1904	CLK
Horizontal Display Time	t5	-	1440	-	CLK
Horizontal Blanking Time	t6	-	160	464	CLK
Clock Frequency	t7(CLK)	-	88.75	106.5	MHz

(frame rate=60Hz)

Timing Diagram of Interface Signal (DE mode)

(1)Vertical

(2)Horizontal

HannStar HannStar Display Corp.
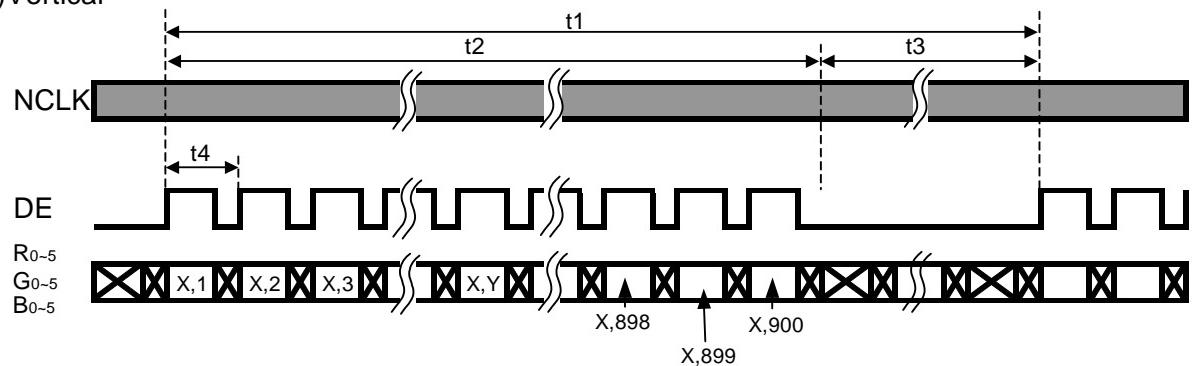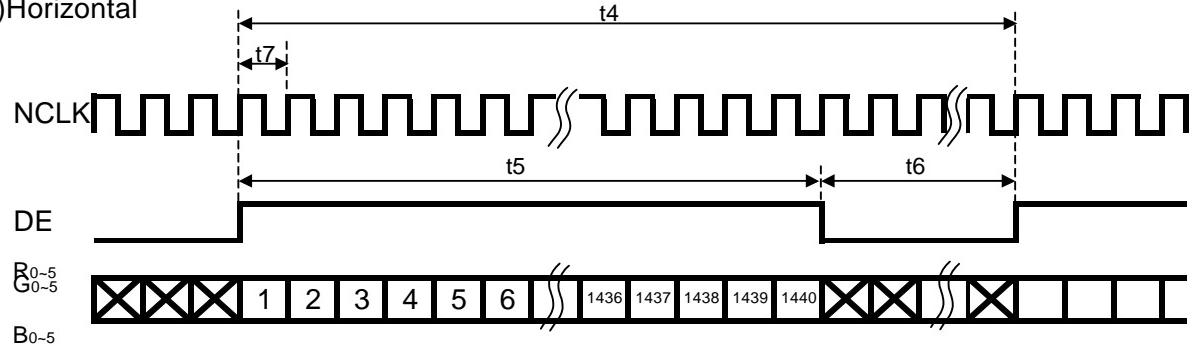
Document Title	HSD170PGW1-A Tentative Product Information	Page No.	23 / 33
Document No.		Revision	1.0

6.6 Power ON/OFF Sequence

Power ON/OFF Sequence
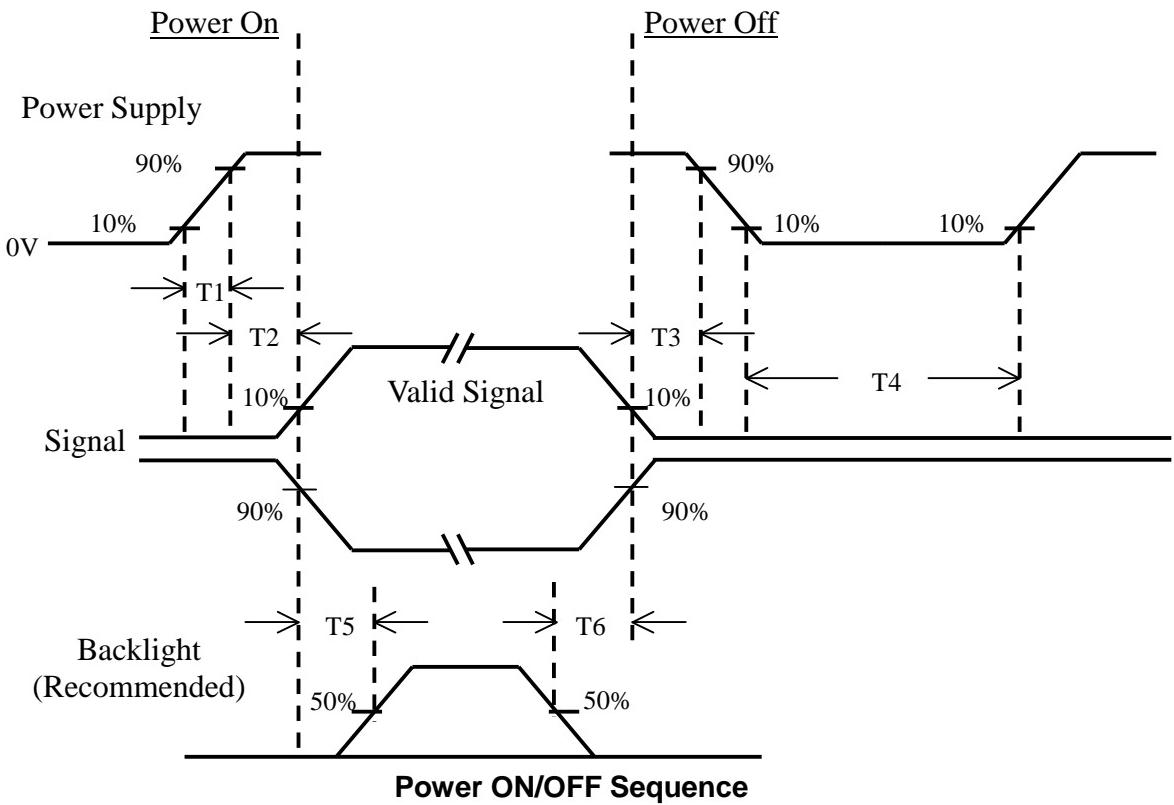
500 usec < T1 ≤ 10 msec   Back-light:

0 < T2 ≤ 50 msec   200 ms ≤ T5

0 < T3 ≤ 50 msec: 200 msec < T6

200 ms ≤ T4

Note (1) Apply the lamp volatge within the LCD operation range. When the back-light turns on before the LCD operation or the LCD truns off before the back-light turns off. the display may momentarily become white.

(2) In case of V_{DD} = off level, please keep the level of input signal on 0 voltage.

(3) T4 should be measured after the module has been fully discharged between power off and on period.

HannStar Display Corp.

Document Title	HSD170PGW1-A Tentative Product Information	Page No.	24 / 33
Document No.		Revision	1.0

7.0   OUTLINE DIMENSION

Unit : mm
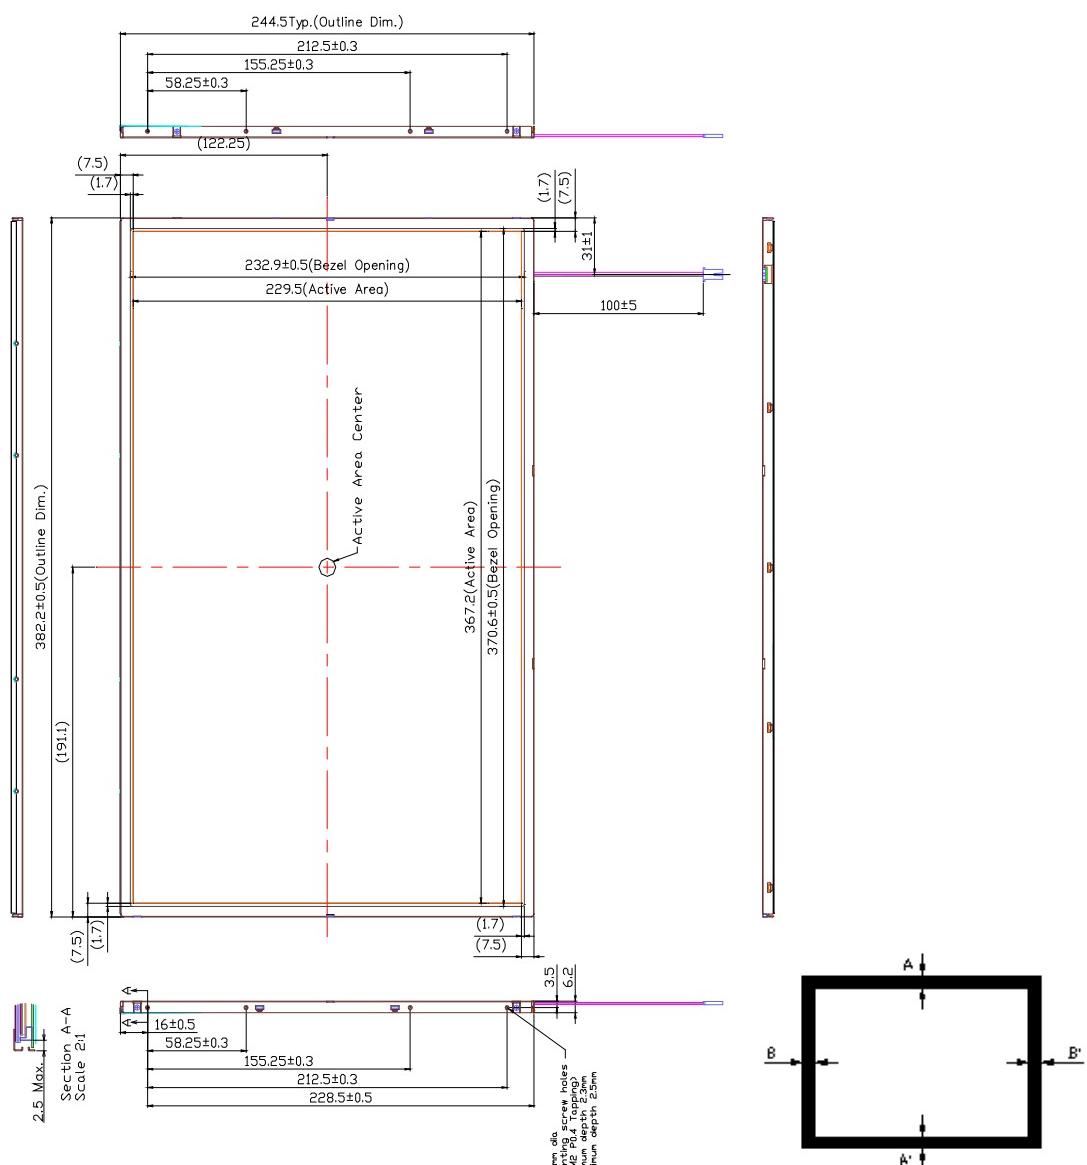
BM   Assembly Tolerance

| A-A' | ≤ **1.0** (mm)

| B-B' | ≤ **1.0** (mm)

7.2 Back View Outline Dimension

CN1(I/F):JAE FI-XB30SL-HF10

123.3±0.3

27.3±0.3

Active Area Center

CN2:JST BHSR-02VS-1
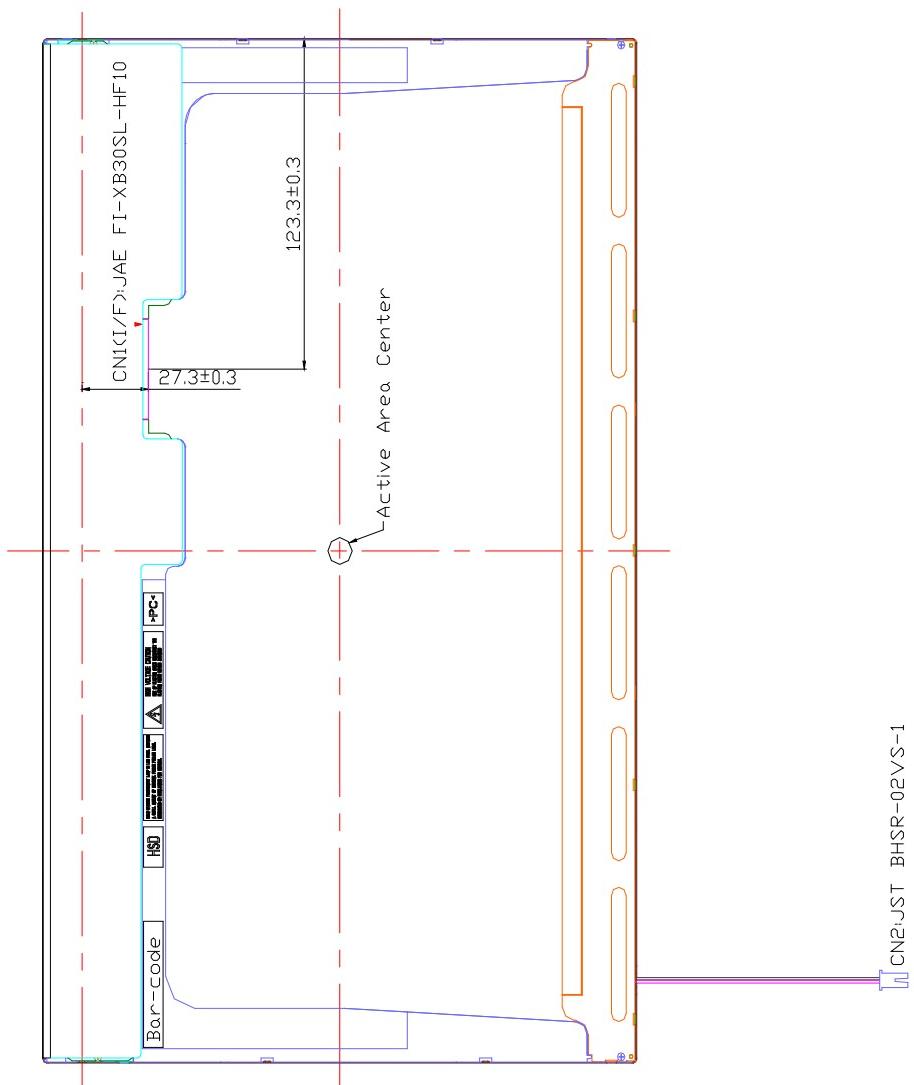
Document Title	HSD170PGW1-A Tentative Product Information	Page No.	26 / 33
Document No.		Revision	1.0

HannStar Display Corp.

8.0 LOT MARK

8.1 Lot Mark

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15

code 1,2,3,4,5,6: HannStar internal flow control code.
code 7: production location.
code 8: production year.
code 9: production month.
code 10,11,12,13,14,15: serial number.

Note (1) Production Year

Year	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008
Mark	9	0	1	2	3	4	5	6	7	8

Note (2) Production Month

Month	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct	Nov.	Dec.
Mark	1	2	3	4	5	6	7	8	9	A	B	C

8.2 Location of Lot Mark

(1) The label is attached to the backside of the LCD module.
(2) This is subject to change without prior notice.
(3) "EDID.XX" ;The EDID Version tend to change if EDID content is modified.

EDID Ver.

HSD170PGW1 ED X.X

HannStar
Hannstar Display Corporation
MADE IN TAIWAN

-A** E212246 RoHS

Rev:

* A 0 K 9 C 0 0 0 A 0 0 0 0 0 3 *

Lot mark

HannStar Display Corp.
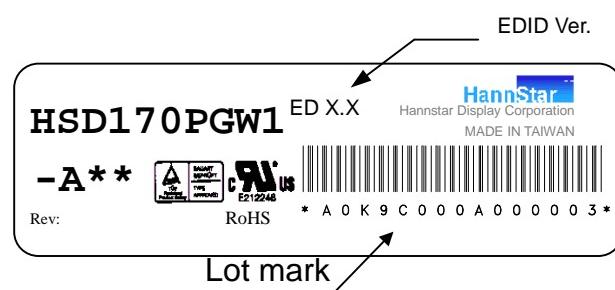
Document Title	HSD170PGW1-A Tentative Product Information	Page No.	27 / 33
Document No.		Revision	1.0

9.0 PACKAGE SPECIFICATION

9.1 packing form

(1) package quantity in one carton: 20 pieces.

(2) carton size: TBD

9.2 packing assembly drawings

HannStar Display Corp.

Document Title	HSD170PGW1-A Tentative Product Information	Page No.	28 / 33
Document No.		Revision	1.0

10.0 GENERAL PRECAUTION

10.1 Use Restriction

This product is not authorized for use in life supporting systems, aircraft navigation control systems, military systems and any other application where performance failure could be life-threatening or otherwise catastrophic.

10.2 Disassembling or Modification

Do not disassemble or modify the module. It may damage sensitive parts inside LCD module, and may cause scratches or dust on the display. HannStar does not warrant the module, if customers disassemble or modify the module.

10.3 Breakage of LCD Panel

10.3.1 If LCD panel is broken and liquid crystal spills out, do not ingest or inhale liquid crystal, and do not contact liquid crystal with skin.

10.3.2 If liquid crystal contacts mouth or eyes, rinse out with water immediately.

10.3.3 If liquid crystal contacts skin or cloths, wash it off immediately with alcohol and rinse thoroughly with water.

10.3.4 Handle carefully with chips of glass that may cause injury, when the glass is broken.

10.4 Electric Shock

10.4.1 Disconnect power supply before handling LCD module.

10.4.2 Do not pull or fold the CCFL cable.

10.4.3 Do not touch the parts inside LCD modules and the fluorescent lamp's connector or cables in order to prevent electric shock.

10.5 Absolute Maximum Ratings and Power Protection Circuit

10.5.1 Do not exceed the absolute maximum rating values, such as the supply voltage variation, input voltage variation, variation in parts' parameters, environmental temperature, etc., otherwise LCD module may be damaged.

10.5.2 Please do not leave LCD module in the environment of high humidity and high temperature for a long time.

10.5.3 It's recommended to employ protection circuit for power supply.

10.6 Operation

10.6.1 Do not touch, push or rub the polarizer with anything harder than HB pencil lead.

10.6.2 Use fingerstalls of soft gloves in order to keep clean display quality, when persons handle the LCD module for incoming inspection or assembly.

10.6.3 When the surface is dusty, please wipe gently with absorbent cotton or other soft material.

10.6.4 Wipe off saliva or water drops as soon as possible. If saliva or water drops contact with polarizer for a long time, they may causes deformation or color fading.

10.6.5 When cleaning the adhesives, please use absorbent cotton wetted with a little petroleum benzine or other adequate solvent.

10.7 Mechanism

Please mount LCD module by using mouting holes arranged in four corners tightly.

10.8 Static Electricity

10.8.1 Protection film must remove very slowly from the surface of LCD module to prevent from electrostatic occurrence.

10.8.2 Because LCD module use CMOS-IC on circuit board and TFT-LCD panel, it is very weak to electrostatic discharge. Please be careful with electrostatic discharge.

Persons who handle the module should be grounded through adequate methods.

10.9 Strong Light Exposure

The module shall not be exposed under strong light such as direct sunlight. Otherwise, display characteristics may be changed.

10.10 Disposal

When disposing LCD module, obey the local environmental regulations.